

G6025 Submersible Well-Light



Wet/Flood Areas - Tree Lighting - Floodlight

The G6025 grade-mounted submersible well light is a real floodlight; ETL listed in both wet location and submersible categories. This fixture is designed and intended for use in low areas of the landscape prone to flooding. It provides excellent landscape illumination using up to 250 watt incandescent PAR and R lamps. The G6025INC is constructed with a heavy cast bronze lamp housing and safety grill within a PVC well sleeve. Dry location up to 150 watts.

Specifications

Housing:

Dark bronze polyester powder-coated cast aluminum or optional cast bronze. Pre-wired and fastened to safety grill with two steel spring clips. 4.5' of STO-WA cord is provided with a watertight seal at the housing entry and at the conduit connection.

Well Sleeve:

Gray Schedule 40 PVC pipe, 9" I.D. x 15". Wall thickness is 3/16".

Convex Lens:

Clear, high-impact tempered glass furnished with a high-temperature silicone gasket for a positive, watertight seal.

Sockets:

Pulse-rated, heavy-duty, glazed porcelain medium base lamps.

Safety Grill:

Standard cast bronze round grill. Optional cast bronze square and square directional grills are available. Grill rotates 360° for glare control and is secured to well sleeve with two self-tapping screws.

Fasteners:

Tamper and corrosion resistant.

Warranty:

Three year limited warranty.

Certification:

ETL Listed to U.S. and Canadian safety standards for wet locations.

Accessories:

G6SA: Square aluminum grill

G6SB: Square bronze grill

G6SDA: Square aluminum directional grill

G6SDB: Square bronze directional grill

Note: Grills will be furnished in the same material as housing. Grills do not meet OSHA standard for walkway grating.



SA/SB



SDA/SDB

G6025 Submersible Well-Light

Project:

Fixture Type:

CBR=Cast Bronze Round (standard G6025)
CBS=Cast Bronze Square

N=Par or R

120=120V

Ordering Logic

Wattage/Lamp	Model No.	Housing/Grill	Lamp	Voltage
250W Incandescent PAR38	G6025I	(CBR,CBS)	(N)	(120)

NOTE: Lamp not included.


Model No:
G6025I

Housing/Grill:


Lamp:
N

Voltage:
120


Dimensions

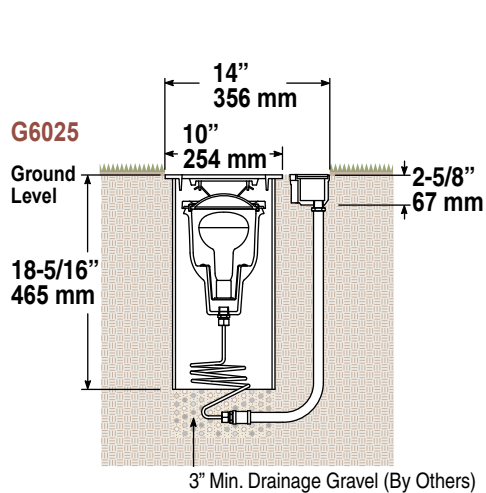

G6025 Side View

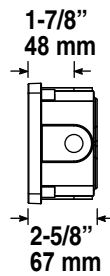

G6025 Bottom View



Project Notes:

Approval:

Any dimension on this sheet is to be assumed a reference dimension and used for information purposes only. It does not govern manufacturing or inspection requirements.

Bronzelite®

100 Craftway Drive • Littlestown, PA 17340
 800 273-1569 • Fax 717 359-9545 www.bronzelite.com

Hg Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled "Contains Mercury" and/or with the symbol "Hg." Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at www.lamprecycle.org