

# Bronzelite

100 Craftway Drive • Littlestown, PA 17340 • Phone: 800 273-1569 • Fax: 717 359-9545 • www.bronzelite.com

## TL6000 Accent Light



### Long Lasting - Rugged - Compact

The TL Series, available in three sizes, offers a choice of light sources, power distribution systems and accessories to create impressive and effective landscape lighting designs. The rugged, heavy-duty construction of the TL Series ensures long-lasting, low maintenance operation.

The TL6000 Series accent lights are small, rugged fixtures used to illuminate a wide variety of small to medium sized landscape and architectural elements. They are the mid-size members of the TL Series designed for sources up to 100 watt PAR/R30. The TL Series also includes the TL5000 sized for MR16 and PAR/R20 lamps and the TL7000 sized for PAR38 and E17 lamps.

## Specifications

### Housing:

Die cast aluminum (copper free) with stainless steel fasteners and fully adjustable swivel arm with vibration-proof locking teeth. Shield for glare control included.

### Lens:

Tempered glass, part of glare shield (included).

### Lamps:

100 watt maximum PAR/R30 incandescent, 50 maximum MR16 quartz with integral transformer, 75 watt maximum MR16 quartz low voltage, and 70 watt maximum PAR/R30 metal halide.

### Gaskets:

High temperature silicone.

### Sockets:

Glazed porcelain.

### Wiring:

Low voltage fixtures include a 3' pigtail and a quick connector for easy hook-up to the supply cable. Incandescent and HID fixtures are wired with high temperature #18 AWG..

### Finish:

Color thermoset polyester powdercoat. Standard finishes include dark bronze and black. Verde finish is hand-rubbed over a black thermoset polyester powdercoat.

### Warranty:

Three year limited warranty.

### Certification:

ETL Listed to U.S. and Canadian safety standards for wet locations.

### Accessories:

**(Must Be Ordered Separately and Field Installed)**

### BML3:

Honeycomb louver.

# TL6000 Accent Light

Project:

Fixture Type:

S=Shield  
 N=PAR or R Lamps  
 BLK=Black  
 DB=Dark Bronze  
 VRD=Verde


## Ordering Logic

Lamp	Model No.	Shroud	Distribution	Finish
70W PAR30 HID	TL6070MH	S	N	( )
100W INC PAR 30	TL6100I	S	N	( )
*Low Voltage, 12V	TL6016LV	S	N	( )
**Low Voltage, 120/12V	TL6016MR	S	N	( )

Note: Lamp not included.  
 \*Low voltage transformer required.  
 \*\*Integral Transformer in fixture.

Model No.	Shroud	Distribution	Finish
	S	N	

## Dimensions

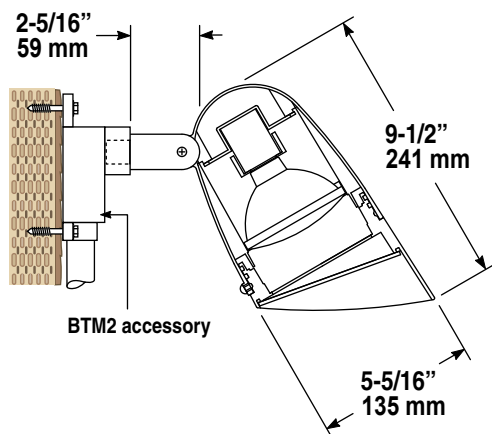

Project Notes:

Approval:

Any dimension on this sheet is to be assumed a reference dimension and used for information purposes only. It does not govern manufacturing or inspection requirements.

## Bronzelite

100 Craftway Drive • Littlestown, PA 17340  
 800 273-1569 • Fax 717 359-9545 [www.bronzelite.com](http://www.bronzelite.com)

Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled "Contains Mercury" and/or with the symbol "Hg." Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at [www.lamprecycle.org](http://www.lamprecycle.org)