

FIXTURE TYPE: _____

PROJECT NAME: _____

BRONZELITE TLCU16 COPPER ACCENT FIXTURE SPECIFICATION SHEET



Elegant, durable, timeless. The Bronzelite Copper Series is constructed of solid copper that patinas gracefully with age. Glass lenses (where applicable), high-temperature sockets, and a ten year limited warranty are your assurances that these luminaires are Sure to endure®.

The Copper Series includes a bullet, a step light, numerous path lights with various roof and stake styles for design flexibility, a surface mount deck light, the PM Post Mount Series for both wooden and vinyl standard 4" x 4" posts, and surface mount line light series available in 6", 12", 18", and 24" lengths.

model TLCU16

SPECIFICATIONS

HOUSING – Machined solid copper with fully adjustable natural brass swivel arm and brass locknut. Fasteners are 300 series stainless steel.

NOTE: The mounting arm has 1/2" NPS male threads to screw on to accessory mounting stake a junction box, sold separately.

FINISH – Natural copper will age naturally to a fine patina.

LENS – Clear tempered glass.

SOCKET – Bi-pin type (GU5.3).

WIRING – 12 volt fixture. Prewired with a 3-ft. pigtail and a quick connector for easy hookup to the supply cable.

LAMP – 35 watt maximum MR16 halogen. 20 watt MR16 lamp included. Covered MR16 are recommended to protect lamps inner capsule. Lower wattage MR16 halogen lamp is acceptable.

WARRANTY – Ten year limited warranty.

CERTIFICATION – UL/cUL Listed to U.S. and Canadian safety standards for wet locations (outdoor).

UL Listed – 35 watt maximum

cUL Listed – 20 watt maximum

ACCESSORIES (Must Be Ordered Separately and Field Installed)



IHLCU16: Louver.



ILSCU16: Spread Lens.



ILIBCU16: Ice Blue Lens




ILLCU16: Linear Spread Lens.

Note: Bronzelite reserves the right to modify the above details to reflect changes in the cost of materials &/or production &/or design without prior notice.
BRONZELITE - GENLYTE GROUP LLC • 100 Craftway • Littlestown, PA 17340 • Ph. (800) 273-1569 • Fax (717) 359-9545 • www.bronzelite.com

FIXTURE TYPE: _____

PROJECT NAME: _____

DIMENSIONS

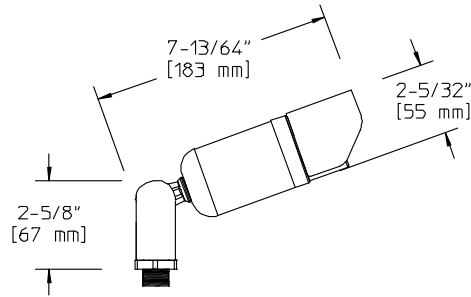

ORDERING LOGIC - TLCU16

Wattage/Lamp	Model No.
35W MR-16 12V*	TLCU1635LV12

**Requires remote transformer.
NOTE: 20W MR-16 lamp included.*

Model No.

TLCU1635LV12

PROJECT NOTES

Bronzelite® Sure to endure®

APPROVAL

Note: Bronzelite reserves the right to modify the above details to reflect changes in the cost of materials &/or production &/or design without prior notice.
BRONZELITE - GENLYTE GROUP LLC • 100 Craftway • Littlestown, PA 17340 • Ph. (800) 273-1569 • Fax (717) 359-9545 • www.bronzelite.com