

## PTL3316D Path Light



### LED Path Light - Durable

Versatile path lights available with dome (LED & T-3) or flat (T-3 only) roofs. LED and T-3 halogen sources provide even illumination in a compact, durable, beautiful luminaire.

UL Listed for both outdoor and indoor use, cUL outdoor only. Cool external temperatures - all below 36°C! - so the luminaire is cool to the touch, including the lens. Perfect for high pedestrian traffic and plant life applications. Exceeds European Standard EN 563 for both 1 second (74°C for coated metal, 80°C for glass) and 4 seconds (61°C for coated metal, 70°C for glass) of contact.

### IP66 Rating

## Specifications

**Housing:**

Die cast aluminum (copper free) lamp holder.

**Roof:**

Die cast aluminum (copper free), gasketed tool-less twist-lock.

**Lens:**

Clear tempered glass.

**Fasteners:**

Captive, stainless steel, tamper resistant.

**Gasket:**

High temperature silicone.

**LEDs:**

Philips Lumiled Rebel, warm white (3000K) or cool white (6000K).

**Electrical:**

OptoElectronix electronic LED driver. 6.5 total watts consumed. Integral electronic LED driver with integral surge protector. Input voltage range of 10.8-17.0 VAC/60Hz.

**Wiring:**

Prewired with a 3' pigtail and a quick connector for easy hook-up to the supply cable.

**Finish:**

Color thermoset polyester powdercoat. Standard finishes include Dark Bronze (DB) and Black (BLK).

**Warranty:**

Five year limited warranty.

**Certification:**

UL Listed to U.S. safety standards for wet locations (outdoors) and for indoors. cUL Listed to Canadian safety standards for wet locations (outdoors).

**IP66 Rating:**

Dust-tight and sealed against direct jets of water.

# PTL3316D Path Light

Project:

Fixture Type:

C=Cool White (6000K)  
W=Warm White (3000K)

BLK=Black  
DB=Dark Bronze

## Ordering Logic

Model No.	LED	Finish
PTL3316D	( )	( )


Note: LEDs included.  
Note: Requires remote magnetic (60Hz) transformer.

Model No:  
**PTL3316D**

LED

Finish:

## Dimensions

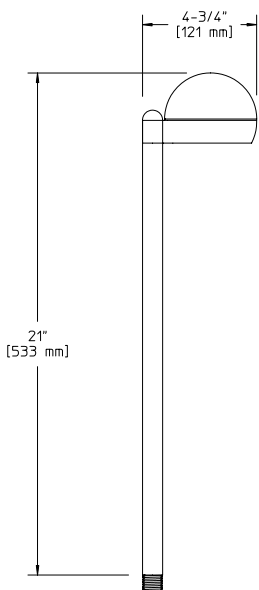


**Project Notes:**

**Approval:**

Any dimension on this sheet is to be assumed a reference dimension and used for information purposes only. It does not govern manufacturing or inspection requirements.

**Bronzelite**<sup>®</sup>  
100 Craftway Drive • Littlestown, PA 17340  
800 273-1569 • Fax 717 359-9545 [www.bronzelite.com](http://www.bronzelite.com)

 Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled "Contains Mercury" and/or with the symbol "Hg." Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at [www.lamprecycle.org](http://www.lamprecycle.org)